

SECTION 05: SPEEDWAY® CABLE LADDER SYSTEMS



Speedway® Cable Ladder Systems provide faster and easier installation, combined with our unique coupler locking system and comprehensive range of accessories.

Manufactured in 3 heights:

- Speedway® 4 (SW4) - 110mm overall height
- Speedway® 5 (SW5) - 125mm overall height
- Speedway® 6 (SW6) - 150mm overall height

Special Profiled Side Section:

1. Enhanced structural rigidity.
2. Increased internal width for cables.
3. High performance coupling.
4. Safety edge.

Slotted Side Section:

1. Allows faster installation as the ladder can be cut to any length and coupled without on-site drilling.
2. Fixing to ladder sides.
3. Reduced weight.

Shallow Channel Rungs:

1. The welding of the rungs to the lowest point of the side section ensures maximum loading height.
2. High strength even in the widest ladders.
3. Compatible with every known type of cleat, tie and bonding with infinite adjustment.
4. Rungs alternately inverted (on lengths) permitting suspension of light fittings etc. from underside.

ACCREDITED TO THE FOLLOWING STANDARDS:



Speedway® Cable Ladder is supplied in various materials and finishes:



Ladder & Fittings

-  Hot dip galvanized Vantrunk Structural Steel (Steel BS EN 10025-2 and Galvanising BS EN 1461)

Covers & Accessories

-  Hot dip galvanized Mild Steel (Steel BS EN 10111 and Galvanising BS EN 1461)

Ladder, Fittings, Covers & Accessories

-  Deep galvanised structural steel (Steel BS EN 10025-5 and Galvanising BE EN 1461)
-  Stainless steel grade 1.4404 (316L marine) to BS EN 10088-2

The Speedway® Cable Ladder System is subject to Registered Design, Trade Mark and Patent considerations and conforms to BS EN 61537.





Speedway® SW4 Cable Ladder

Speedway® 4 (SW4) Medium Duty Cable Ladder is manufactured in 3m lengths as standard, 6m lengths available to order.

Available in standard widths of 150mm, 300mm, 450mm, 600mm, 750mm, 900mm and 1050mm. Widths up to 1200mm are available to order.

Rung spacing is 300mm as standard.

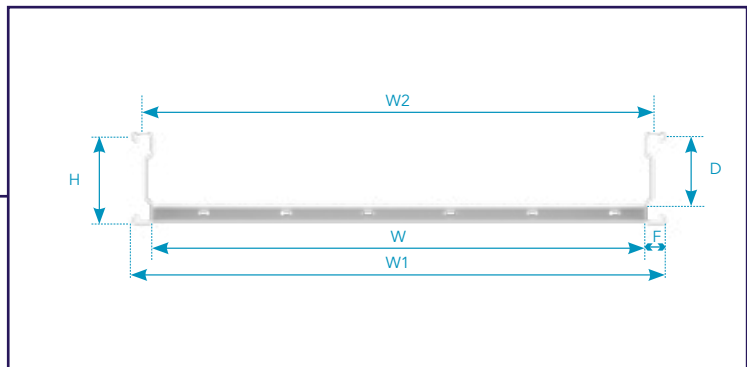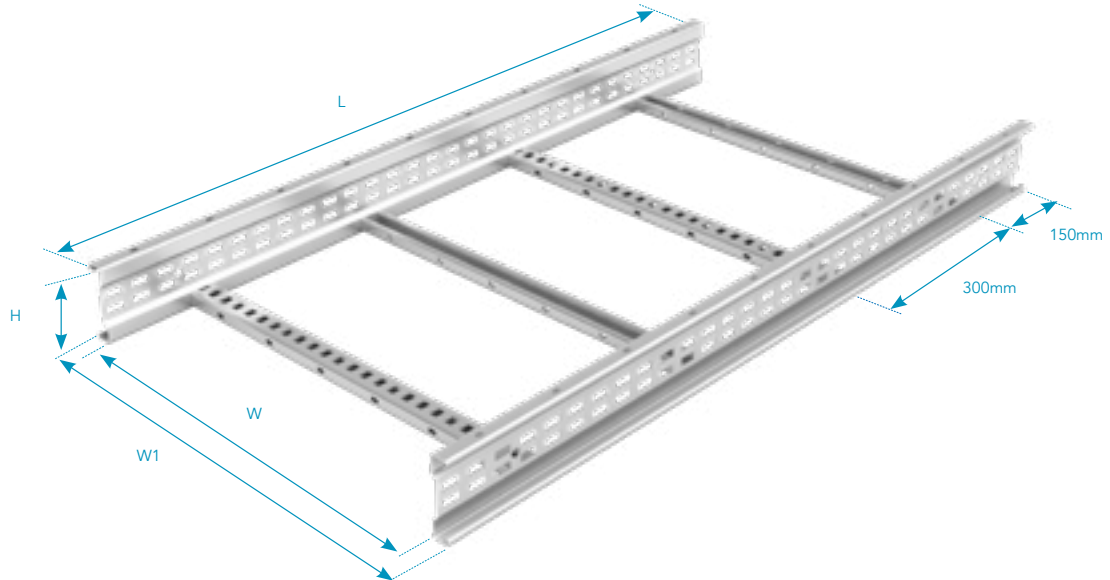

Part Number	No. of Rungs	Dimensions (mm)				Weight* (kg)
		W	W1	L	H	
SW4-SL3-150-○	10	150	200	3000	110	13.93
SW4-SL3-300-○		300	350			15.55
SW4-SL3-450-○		450	500			17.17
SW4-SL3-600-○		600	650			18.79
SW4-SL3-750-○		750	800			23.12
SW4-SL3-900-○		900	950			25.28
SW4-SL3-1050-○		1050	1100			27.34

Height	H	110mm
Loading Depth	D	85mm
Ladder Width	W	100mm to 1050mm
Overall Width	W1	W + 50mm
Maximum Internal Width	W2	W + 14mm
Flange Width	F	25mm

○ = Select a finish/material (Refer to page 22)
Weights shown are for Hot Dip Galvanised finish only.

QuickFix Trunking

QuickFix Multi Compartment Trunking

Lighting Trunking

Uniklip Cable Tray

Speedway Cable Ladder Pre-Galv. Cable Ladder

Cable Basket Systems

Channel & Support

Floor Trunking

Bench Outlet & Perimeter Trunking

Steel Conduit (Class 4)

Innovative Design Solutions

Accessories & Supports

Index