



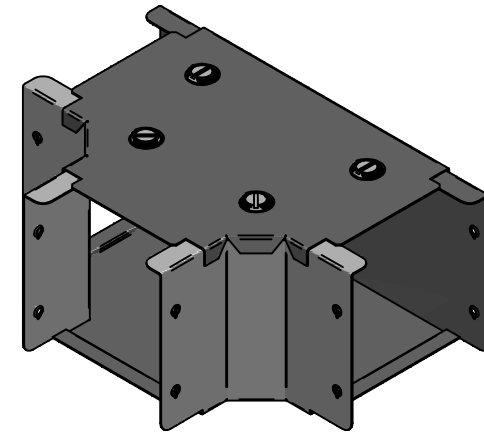


QuickFix

Size	Width	Height
GTT22	50.8	50.8
GTT32	76.2	50.8
GTT33	76.2	76.2
GTT42	101.6	50.8
GTT43	101.6	76.2
GTT44	101.6	101.6
GTT62	152.4	50.8
GTT63	152.4	76.2
GTT64	152.4	101.6
GTT66	152.4	152.4
GTT82	203.2	50.8
GTT83	203.2	76.2
GTT84	203.2	101.6
GTT88	203.2	203.2
GTT92	228.6	50.8
GTT93	228.6	76.2
GTT94	228.6	101.6
GTT96	228.6	152.4
GTT99	228.6	228.6

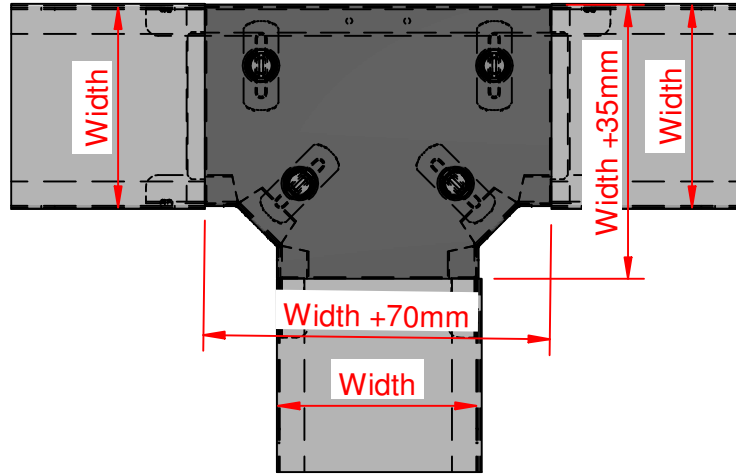

- ✓ Fast fitting **UniBolt** reduces installation time by as much as 80%
- ✓ **IP4X compliant** as standard
- ✓ **Completes the range** of fast fitting and innovative Cable Management Solutions

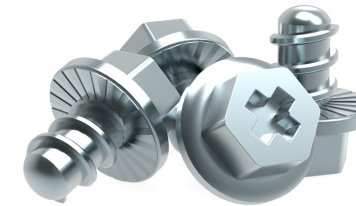

In accordance with Unitrunk's policy of continuous improvement, Unitrunk reserves the right to change specifications and designs without notice. Data is the copyright of Unitrunk Ltd and not to be reproduced or passed to a third party without written consent.

Cable Trunking & Ducting Standard BS EN 50085-1 & BS EN 50085-2-1	Material Standard BS EN 10346 (Pre Galv)		Quality Recognition	
	Unitrunk Head Office: 4 Altona Road, Lisburn, BT27 5QB +44 28 9262 5100 info@unitrunk.co.uk unitrunk.co.uk unitrunk.ie	Lid Fixing Retained Toggle	Torque Value 3 N m	
	Data Sheet Reference Gusset Tee Top Lid	Revision 2.01		

