


Product	Code W1	Width 1	Code H1	Height 1	Code W2	Width 1	Code H2	Height 1
RE	2	50.8	2	50.8	2	50.8	2	50.8
	3	76.2	3	76.2	3	76.2	3	76.2
	4	101.6	4	101.6	4	101.6	4	101.6
	6	152.4	6	152.4	6	152.4	6	152.4
	8	203.2	8	203.2	8	203.2	8	203.2
	9	228.6	9	228.6	9	228.6	9	228.6

- ✓ Fast fitting **UniBolt** reduces installation time by as much as 80%
- ✓ IP4X compliant as standard
- ✓ Completes the range of fast fitting and innovative Cable Management Solutions

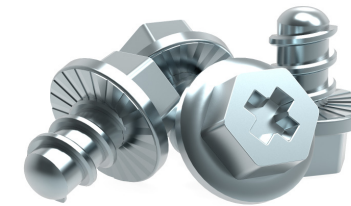

In accordance with Unitrunk's policy of continuous improvement, Unitrunk reserves the right to change specifications and designs without notice. Data is the copyright of Unitrunk Ltd and not to be reproduced or passed to a third party without written consent.

Cable Trunking & Ducting Standard BS EN 50085-1 & BS EN 50085-2-1		Material Standard BS EN 10346 (Pre Galv)		Quality Recognition	
Unitrunk Head Office: 4 Altona Road, Lisburn, BT27 5QB +44 28 9262 5100   info@unitrunk.co.uk unitrunk.co.uk   unitrunk.ie		Lid Fixing Screw Fixed	Torque Value 3 N m		
		Data Sheet Reference Reducer	Revision 2.01		



# UNITRUNK